


# Onyx<sup>®</sup> Vantage 9590

Finger Pulse Oximeter

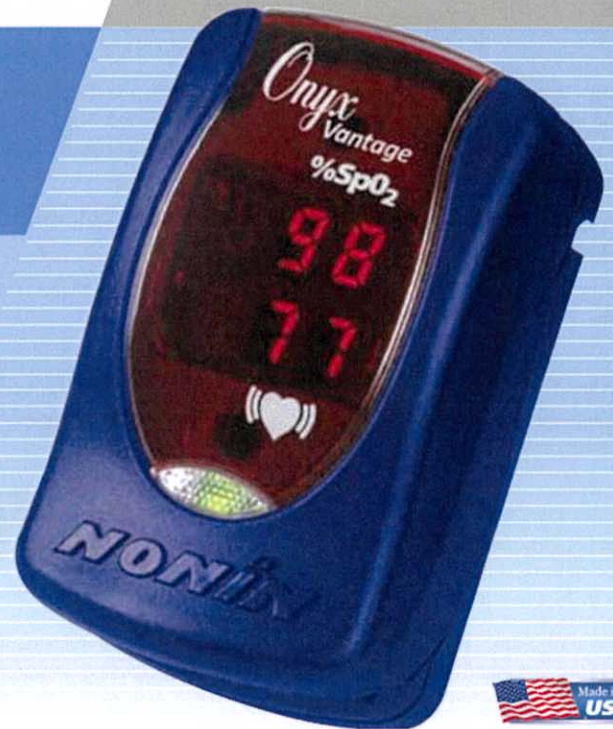

## Accuracy you can act on<sup>™</sup>.

When you need to make decisions quickly, you do not have time to question the accuracy of your finger pulse oximeter. You can trust Nonin Medical's Onyx<sup>®</sup> Vantage finger pulse oximeter with PureSAT<sup>®</sup> technology to quickly and accurately capture SpO<sub>2</sub> and pulse rate measurements — even on patients where low perfusion is a challenge. In fact, Onyx is the only finger pulse oximeter brand whose accuracy and performance claims are supported by published peer-reviewed, clinical studies. Accuracy matters, and Onyx Vantage provides accurate data for actionable decision making.





# Onyx® Vantage 9590

## Product Highlights

The Onyx is the only finger pulse oximeter with scientifically proven accuracy and is tested for use on fingers, thumbs and toes.

- **Proven Accuracy** – Scientifically proven accuracy in the widest range of patients.
- **Reliable Results** – Accurate readings on your challenging cases due to low perfusion and darker skin tones. And, Onyx Vantage 9590 has been tested in motion.
- **Versatile** – One unit works on pediatric to larger adult patients and can be used on fingers, thumbs or toes.
- **Cost Efficient** – 4-year warranty and up to 6,000 spot checks on two AAA batteries.



The Onyx Vantage is a valuable tool in any situation where a fast and accurate reading of blood oxygen saturation and pulse rates are needed. The Onyx Vantage finger pulse oximeter is intended for use by health professionals and features:

**Clinician-facing, easy-to-read, bright LED** – SpO<sub>2</sub> and pulse rate can be read from any angle, in all lighting conditions, day or night.

**Three-color pulse quality indicator LED** – Green, yellow or red light provides a quick assessment of patient pulse quality.

**Accuracy in the widest range of patients and conditions** – Only Nonin uses PureSAT® SpO<sub>2</sub> technology – an intelligent pulse-by-pulse filtering to provide accuracy in situations that are challenging due to dark skin tones, low perfusion and more.

**One product for pediatric to adult patients** – Automatically adjusts to each patient from pediatric to adult quickly and accurately and accommodates fingers, thumbs and toes with digit thicknesses: 8 mm to 25.4 mm (0.3" to 1.0").



**Proven durability** – Onyx Vantage is tough enough to withstand a minimum of 50 drops, is rugged enough to be used in the most demanding situations and exceeds IP32 water ingress testing.

**Automatic turn on and off** – No on/off button! Just insert digit for fast and easy spot checks. The auto-on/off mechanism allows two AAA batteries to provide up to 6,000 spot checks before being replaced!

**Portable** – Take the Onyx Vantage anywhere — it is lightweight and weighs less than two ounces.

**Available in four colors** – Black, Red, Blue and Purple. Complete with lanyard, instructions on CD and two AAA batteries. Optional carrying case and retractable lanyard available.



## Specifications

<b>Dimensions</b> .....	5.59 cm (2.2") L x 3.3 cm (1.3") W x 3.23 cm (1.27") H
<b>Warranty</b> .....	1 years
<b>Oxygen Saturation Display Range</b> .....	0 – 100% SpO <sub>2</sub>
<b>Pulse Rate Display Range</b> .....	18 – 321 beats per minute (BPM)
<b>Oxygen Saturation Declared Accuracy Range (A<sub>95%</sub>*)</b> .....	70 – 100% SpO <sub>2</sub> ±2 digits
<b>Low Perfusion Oxygen Saturation Declared Accuracy Range (A<sub>95%</sub>*)</b> .....	70 – 100% SpO <sub>2</sub> ±2 digits
<b>Pulse Rate Declared Accuracy Range (A<sub>95%</sub>*)</b> .....	20 – 250 BPM ±3 digits
<b>Low Perfusion Pulse Rate Declared Accuracy Range (A<sub>95%</sub>*)</b> .....	40 – 240 BPM ±3 digits
<b>Measurement Wavelengths and Output Power**</b>	
Red .....	660 nanometers @ 0.8 mw maximum average
Infrared .....	910 nanometers @ 1.2 mw maximum average
<b>Temperature</b>	
Operating .....	-5° to +40°C (+23° to +104°F)
Storage/Transportation .....	-40° to +70°C (-40° to +158°F)
<b>Humidity</b>	
Operating .....	10 – 90% non-condensing
Storage/Transportation .....	10 – 95% non-condensing
<b>Altitude</b>	
Operating .....	Up to 12,192 meters (40,000 feet)
Hyperbaric Pressure .....	Up to 4 atmospheres
<b>Battery Life</b>	
Operating .....	Approximately 6,000 spot-checks or 36 hours of continuous operation using new AAA-size alkaline batteries
Storage .....	12 months

Classifications per IEC 60601-1 / CAN/CSA-C22.2 No. 601.1 / UL 60601-1:  
 Degree of Protection ..... Type BF-Applied Part  
 Mode of Operation ..... Continuous  
 Enclosure Degree of Ingress Protection ..... IP32

This product complies with ISO 10993-1, Biological evaluation of medical devices – Part 1: Evaluation and testing.

\*±1 A<sub>95%</sub> represents approximately 68% of measurements.

\*\*This information is especially useful for clinicians performing photodynamic therapy.

Specifications are subject to change without notice.

Authorized Distributor:

### The HomeCare Medical Ltd.

401-403 Wing Ming Industrial Centre,  
 15 Cheung Yue Street,  
 Lai Chi Kok, Kowloon  
 Phone: 2402-2188 Fax: 2411-2323

©2012 Nonin Medical, Inc. All trademarks are the property of Nonin Medical, Inc. unless otherwise noted.  
 P/N 8529-001-02

